

09-08-00  
FISH & RICHARDSON P.C.

September 7, 2000

Attorney Docket No.: 08935-220001

**Box Patent Application**  
Commissioner for Patents  
Washington, DC 20231

Presented for filing is a new original patent application of:

Applicant: WEIFANG LUO, ALEXANDER B. SHELEKHIN  
AND MATTHEW SYLVESTRE

Title: BATTERY CATHODE

Enclosed are the following papers, including those required to receive a filing date  
under 37 CFR 1.53(b):

	<u>Pages</u>
Specification	9
Claims	4
Abstract	1
Declaration	[To be Filed at a Later Date]
Drawing(s)	1

Enclosures:  
— Postcard.

Basic filing fee	\$690
Total claims in excess of 20 times \$18	\$252
Independent claims in excess of 3 times \$78	\$0
Fee for multiple dependent claims	\$0
Total filing fee:	\$942

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL485675126US

I hereby certify under 37 CFR §1.10 that this correspondence is being  
deposited with the United States Postal Service as Express Mail Post  
Office to Addressee with sufficient postage on the date indicated below  
and is addressed to the Commissioner for Patents, Washington,  
D.C. 20231.

Date of Deposit 9/7/00

Signature

Jonathan R. Howard

Typed or Printed Name of Person Signing Certificate

225 Franklin Street  
Boston, Massachusetts  
02110-2804

Telephone  
617 542-5070

Facsimile  
617 542-8900

Web Site  
www.fr.com

Frederick P. Fish  
1855-1930

W.K. Richardson  
1859-1951

BOSTON

DALLAS

DELAWARE

NEW YORK

SAN DIEGO

SILICON VALLEY

TWIN CITIES

WASHINGTON, DC

1978年	1979年
1980年	1981年
1982年	1983年
1984年	1985年
1986年	1987年
1988年	1989年
1990年	1991年
1992年	1993年
1994年	1995年
1996年	1997年
1998年	1999年
2000年	2001年
2002年	2003年
2004年	2005年
2006年	2007年
2008年	2009年
2010年	2011年
2012年	2013年
2014年	2015年
2016年	2017年
2018年	2019年
2020年	2021年
2022年	2023年
2024年	2025年
2026年	2027年
2028年	2029年
2030年	2031年
2032年	2033年
2034年	2035年
2036年	2037年
2038年	2039年
2040年	2041年
2042年	2043年
2044年	2045年
2046年	2047年
2048年	2049年
2050年	2051年
2052年	2053年
2054年	2055年
2056年	2057年
2058年	2059年
2060年	2061年
2062年	2063年
2064年	2065年
2066年	2067年
2068年	2069年
2070年	2071年
2072年	2073年
2074年	2075年
2076年	2077年
2078年	2079年
2080年	2081年
2082年	2083年
2084年	2085年
2086年	2087年
2088年	2089年
2090年	2091年
2092年	2093年
2094年	2095年
2096年	2097年
2098年	2099年
2100年	2101年
2102年	2103年
2104年	2105年
2106年	2107年
2108年	2109年
2110年	2111年
2112年	2113年
2114年	2115年
2116年	2117年
2118年	2119年
2120年	2121年
2122年	2123年
2124年	2125年
2126年	2127年
2128年	2129年
2130年	2131年
2132年	2133年
2134年	2135年
2136年	2137年
2138年	2139年
2140年	2141年
2142年	2143年
2144年	2145年
2146年	2147年
2148年	2149年
2150年	2151年
2152年	2153年
2154年	2155年
2156年	2157年
2158年	2159年
2160年	2161年
2162年	2163年
2164年	2165年
2166年	2167年
2168年	2169年
2170年	2171年
2172年	2173年
2174年	2175年
2176年	2177年
2178年	2179年
2180年	2181年
2182年	2183年
2184年	2185年
2186年	2187年
2188年	2189年
2190年	2191年
2192年	2193年
2194年	2195年
2196年	2197年
2198年	2199年
2200年	2201年
2202年	2203年
2204年	2205年
2206年	2207年
2208年	2209年
2210年	2211年
2212年	2213年
2214年	2215年
2216年	2217年
2218年	2219年
2220年	2221年
2222年	2223年
2224年	2225年
2226年	2227年
2228年	2229年
2230年	2231年
2232年	2233年
2234年	2235年
2236年	2237年
2238年	2239年
2240年	2241年
2242年	2243年
2244年	2245年
2246年	2247年
2248年	2249年
2250年	2251年
2252年	2253年
2254年	2255年
2256年	2257年
2258年	2259年
2260年	2261年
2262年	2263年
2264年	2265年
2266年	2267年
2268年	2269年
2270年	2271年
2272年	2273年
2274年	2275年
2276年	2277年
2278年	2279年
2280年	2281年
2282年	2283年
2284年	2285年
2286年	2287年
2288年	2289年
2290年	2291年
2292年	2293年
2294年	2295年
2296年	2297年
2298年	2299年
2300年	2301年
2302年	2303年
2304年	2

Commissioner for Patents  
September 7, 2000  
Page 2

A check for the filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.

If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (617) 542-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

ROBERT C. NABINGER  
Fish & Richardson P.C.  
225 Franklin Street  
Boston, MA 02110-2804

Respectfully submitted,

In Nyngem

Tu N. Nguyen  
Reg. No. 42,934  
Enclosures  
TXN/gxf  
20098527.doc

APPLICATION  
FOR  
UNITED STATES LETTERS PATENT

TITLE: BATTERY CATHODE

APPLICANT: WEIFANG LUO, ALEXANDER B. SHELEKHIN AND  
MATTHEW SYLVESTRE

CERTIFICATE OF MAILING BY EXPRESS MAIL


Express Mail Label No. EL485675126US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

September 7, 2000

Date of Deposit

Signature



Jonathan R. Howard

Typed or Printed Name of Person Signing Certificate

00658043 24089960

# Battery Cathode

## BACKGROUND

The invention relates to batteries.

Batteries, such as primary alkaline batteries, are commonly used as energy sources.

5 Generally, alkaline batteries include a cathode, an anode, a separator, and an electrolytic solution. The cathode can include, for example, manganese dioxide particles as the active material, graphite particles that enhance the conductivity of the cathode, and a binder. The anode may be, for example, a gel including zinc particles as the active material. The separator is disposed between the cathode and the anode. The electrolytic solution can be,  
10 for example, a hydroxide solution that is dispersed throughout the battery.

It is desirable for a primary alkaline battery to have a high discharge capacity. One factor that affects the discharge capacity is the quantity of manganese dioxide in the cathode. As a general rule, the more manganese dioxide in the cathode, the higher the discharge capacity of the battery. But the cathode must also include a sufficient quantity of graphite  
15 particles for adequate conductivity. Thus, the quantity of manganese dioxide that can be included in the cathode is limited in part by the quantity of graphite particles required for adequate conductivity.

## SUMMARY

The invention relates to using carbon fibers in the cathode of primary alkaline  
20 batteries. The carbon fibers, particularly after heat treatment, generally have higher electrical conductivity than graphite or carbon particles. As a result, cathodes with carbon fibers typically have higher conductivity than cathodes with graphite or carbon particles. Furthermore, because of their enhanced conductivity and fibrous morphology, less carbon fibers are needed in the cathode in order to provide the cathode with sufficient conductivity  
25 for effective battery performance. Consequently, more cathode active material can be added to the cathode, thereby increasing the capacity and high power performance of the battery.

The carbon fibers generally have high surface areas and high surface energies. These properties can provide the fibers with good wicking action to draw the electrolytic solution

into the pores of the cathode. More electrolyte in the cathode, e.g., due to good wicking, generally improves mass transfer in the cathode and improves the performance of the battery. The fibrous morphology of the fibers can also act as a reinforcing medium to mechanically strengthen the cathode. Moreover, the carbon fibers can be produced inexpensively, which lowers the cost of producing the batteries.

In one aspect, the invention features a primary alkaline battery including a cathode having a cathode active material and carbon fibers, an anode, e.g., one having zinc as an anode active material, a separator, and an alkaline electrolyte.

Embodiments may include one or more of the following features.

The cathode can include less than about 5% of carbon fibers by weight, e.g., less than about 4%, about 3%, and about 2% of carbon fibers by weight. The battery can include between about 1% and about 5%, e.g., between about 2% and about 3%, of carbon fibers by weight. The cathode can include greater than about 86%, e.g., greater than about 88%, about 90%, and about 92%, of cathode active material, e.g., manganese dioxide, by weight.

The carbon fibers can have a diameter less than about 250 nanometers, e.g., about 60 nanometers and about 100 nanometers, and less than about 60 nanometers.

The carbon fibers can be heat treated, e.g., at a temperature greater than about 2000 °C, e.g., between about 2600 °C and about 3100 °C.

The carbon fibers can have a length less than about  $2 \times 10^5$  nanometers, e.g., between about 500 nanometers and about 200,000 nanometers such as between about 70,000 nanometers and about 100,000 nanometers.

The carbon fibers can include between about 1 and about 500 layers of graphite, e.g., between about 40 and about 100 layers of graphite.

The carbon fibers can have an external surface area between about  $10 \text{ m}^2/\text{g}$  and about  $50 \text{ m}^2/\text{g}$ , and a surface energy between about  $50 \text{ mJ/m}^2$  and about  $300 \text{ mJ/m}^2$ .

The carbon fibers can have a graphitic index of less than about 85%.

The carbon fibers can have a length equal to or greater than an average particle size of the cathode active material.

The cathode can further include a surfactant, e.g., polyvinyl alcohol (PVA), ethylene-vinyl alcohol (EVOH), and polyvinylbutyrol.

In another aspect, the invention features primary alkaline battery having a cathode including manganese dioxide and a heat-treated carbon material having a diameter less than about 250 nanometers, an anode, a separator, and an alkaline electrolyte.

The cathode can include between about 1% and about 5%, e.g., between about 2% and about 3%, of carbon fibers by weight. The cathode can have an electrical conductivity at least 3 times greater than a cathode having about 6% of graphite

As used herein, "fiber" refers to an elongated structure generally having a small circumference or width in proportion to a length or height. A fiber can have a substantially circular or substantially non-circular cross section and/or a smooth or rough, irregular surface. A fiber can extend generally linearly or crookedly. Examples of a fiber include a thread, a filament, and a whisker.

As used herein, "diameter" means average diameter; and "length" means average length.

Other features, objects, and advantages of the invention will be apparent from the drawings, description, and claims.

## DESCRIPTION OF DRAWINGS

The Figure is a side-sectional view of a battery.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to the Figure, battery 10 includes a cathode 12, an anode 14, a separator 16, and a cylindrical housing 18. Battery 10 also includes a current collector 20, a seal 22, and a negative metal top cap 24, which serves as the negative terminal for the battery. Cathode 12 is in contact with housing 18, and the positive terminal of battery 10 is at the opposite end of battery 10 from the negative terminal. An electrolytic solution is dispersed throughout battery 10. Battery 10 can be, for example, a AA, AAA, AAAA, C, or D battery.

Cathode 12 includes manganese dioxide, carbon fibers, and a binder.

The manganese dioxide can be electrolytically-synthesized  $\text{MnO}_2$  (EMD), or chemically-synthesized  $\text{MnO}_2$  (CMD), or a blend of EMD and CMD. Distributors of manganese dioxides include Kerr McGee, Co. (Trona D), Chem Metals, Co., Tosoh, Delta Manganese, Mitsui Chemicals and JMC. Preferably, the manganese dioxide is EMD having a high power coefficient, as described in U.S. Application No. 09/563,447, filed May 1,

2000, hereby incorporated by reference in its entirety. Generally, cathode 12 may include between about 86% and about 92%, preferably between about 88% and about 91%, and more preferably between about 89% and about 91%, of manganese dioxide by weight.

The carbon fibers are graphitic fibers made of multiple layers of graphite. Preferably, the carbon fibers contain about 1 to about 500 layers of graphite, more preferably about 40 to about 100 layers of graphite. The electrical conductivity of the fibers generally increases as the number of graphite layers in the fibers decreases. Thus, cathodes with fibers having a low number of layers typically have high conductivity compared to cathodes with fibers having a relatively high number of graphite layers. Preferably, the carbon fibers have a graphitic index of greater than about 50%, e.g., between about 50% and about 85%, e.g., about 75%. The graphitic index, a measure of the degree of graphitization of the fibers, is defined as  $g_p = (.3440 - D\text{-spacing}) / (.3440 - .3354)$ , where D-spacing is the measured D-spacing of the carbon fibers in nanometers. The carbon fibers can include small amounts, e.g., less than 60 ppm, of other materials, such as, for example, iron, cobalt, and nickel.

The carbon fibers are available under the trademark PYROGRAF-III™ from Applied Sciences, Inc. (Cedarville, OH). Methods of making carbon fibers are described in U.S. Patent No. 5,594,060 and references cited therein, all of which are incorporated by reference in their entirety.

The carbon fibers preferably have diameters less than about 250 nanometers, more preferably from about 60 to about 200 nanometers, and most preferably from about 60 to about 100 nanometers. The length of the fibers is generally at least as long as the size of the manganese dioxide particles. For example, the fibers can be about 500 nanometers to about 200,000 nanometers long.

Preferably, the carbon fibers are heat treated before they are incorporated into the cathode. Heat treating the fibers at about 2600-3100 °C, e.g., at about 2900-3000 °C, generally increases the electrical conductivity of the fibers and the conductivity of the cathode, when the fibers are later incorporated therein. It is believed that when the fibers are synthesized, a poorly conductive overcoat or layer of carbon is formed on the surface of the fibers. Heat treating the fibers converts the carbon layer to graphite to improve the conductivity of the fibers.

The heat-treated carbon fibers can enhance the performance of battery 10 by lowering the percolation threshold of the cathode. The percolation threshold is the amount of material, here carbon fibers, that is preferably added to the cathode to provide the cathode with sufficient conductivity to be effectively used in battery 10. Without wishing to be bound to any theories, it is believed that the fibrous structure of the carbon fibers allow the fibers to stretch among the manganese dioxide particles, thereby increasing the contact between the fibers and the cathode active material and more effectively increasing the conductivity of the cathode. Thus, it is possible to add less carbon fiber (an inert material) while maintaining a desired electrical conductivity of the cathode.

Accordingly, while some batteries preferably have between about 5-7% by weight of carbon particles, cathode 12 may include less than 5% of carbon fibers by weight, for example, less than 4%, or less than 3%, or less than 2% by weight of carbon fibers. Preferably, cathode 12 includes between about 1% and about 5% of carbon fibers by weight, more preferably between about 2% and about 3% by weight.

The volume "freed up" by reducing the amount of carbon in the cathode can be filled with manganese dioxide to increase the capacity of battery 10. Moreover, because the carbon fibers typically have different densities than the cathode active material, e.g., manganese dioxide, reducing the amount of the carbon fibers can sometimes allow more than a 1:1 amount of cathode active material to be replaced into the cathode.

As features of their fibrous structure or morphology, the carbon fibers have high surface areas and high surface energies. Generally, as the diameter of the fibers decreases, the surface energy of the fibers increases. In certain embodiments, the fibers can have an external surface area from about 10 m<sup>2</sup>/g to about 50 m<sup>2</sup>/g, and a surface energy from about 50 mJ/m<sup>2</sup> to about 300 mJ/m<sup>2</sup>, e.g., about 100 mJ/m<sup>2</sup>. It is believed that the high surface areas and energies of the fibers increase the hydrophilicity of the fibers. Increased hydrophilicity of the fibers provides the cathode with enhanced wicking action to improve the rate at which the electrolytic solution is sorbed into the cathode and the amount of electrolyte sorbed to the cathode. Increased electrolyte concentration in the cathode generally improves mass transfer within the pores of the cathode and improves performance of the battery.



To further increase the hydrophilicity of the fibers, a surfactant may be added to the fibers. Examples of surfactants include, e.g., polyvinyl alcohol (PVA), ethylene-vinyl alcohol (EVOH), and polyvinylbutyrol.

The fibrous structure of the carbon fibers also mechanically reinforces the cathode. Generally, the strength of the cathode increases after the carbon fibers are incorporated into the cathode.

Examples of binders include polyethylene powders, polyacrylamides, Portland cement and fluorocarbon resins, such as polyvinylidene fluoride (PVDF) and polytetrafluoroethylene (PTFE). An example of polyethylene binder is sold under the tradename Coathylene HA-1681 (available from Hoescht). The cathode may include, for example, between 0.1 percent to about 1 percent of binder by weight.

Cathode 12 can include other additives. Examples of these additives are disclosed, for example, in U.S. Patent No. 5,342,712, which is hereby incorporated by reference. Cathode 12 may include, for example, from about 0.2 weight percent to about 2 percent TiO<sub>2</sub> weight.

The electrolyte solution also is dispersed through cathode 12, and the weight percentages provided above and below are determined after the electrolyte solution has been dispersed.

Anode 14 can be formed of any of the standard zinc materials used in battery anodes. For example, anode 14 can be a zinc gel that includes zinc metal particles, a gelling agent, and minor amounts of additives, such as gassing inhibitor. In addition, a portion of the electrolyte solution is dispersed throughout the anode.

The zinc particles can be any of the zinc particles conventionally used in gel anodes. Examples of zinc particles include those described in U.S.S.N. 08/905,254, U.S.S.N. 09/115,867, and U.S.S.N. 09/156,915, which are assigned to the assignee in the present application and are hereby incorporated by reference. The anode may include, for example, between 67% and 71% of zinc particles by weight.

Examples of gelling agents include polyacrylic acids, grafted starch materials, salts of polyacrylic acids, polyacrylates, carboxymethylcellulose or combinations thereof. Examples of such polyacrylic acids are Carbopol 940 and 934 (available from B.F. Goodrich) and Polygel 4P (available from 3V), and an example of a grafted starch material is Waterlock

A221 (available from Grain Processing Corporation, Muscatine, IA). An example of a salt of a polyacrylic acid is Alcosorb G1 (available from Ciba Specialties). The anode may include, for example, from 0.1 percent to about 1 percent gelling agent by weight.

Gassing inhibitors can be inorganic materials, such as bismuth, tin, lead and indium. Alternatively, gassing inhibitors can be organic compounds, such as phosphate esters, ionic surfactants or nonionic surfactants. Examples of ionic surfactants are disclosed in, for example, U.S. Patent No. 4,777,100, which is hereby incorporated by reference.

Separator 16 can have any of the conventional designs for battery separators. In some embodiments, separator 16 can be formed of two layers of non-woven, non-membrane material with one layer being disposed along a surface of the other. To minimize the volume of separator 16 while providing an efficient battery, each layer of non-woven, non-membrane material can have a basic weight of about 54 grams per square meter, a thickness of about 5.4 mils when dry and a thickness of about 10 mils when wet. In these embodiments, the separator preferably does not include a layer of membrane material or a layer of adhesive between the non-woven, non-membrane layers. Generally, the layers can be substantially devoid of fillers, such as inorganic particles.

In other embodiments, separator 16 includes an outer layer of cellophane with a layer of non-woven material. The separator also includes an additional layer of non-woven material. The cellophane layer can be adjacent cathode 12 or the anode. Preferably, the non-woven material contains from about 78 weight percent to about 82 weight percent PVA and from about 18 weight percent to about 22 weight percent rayon with a trace of surfactant. Such non-woven materials are available from PDM under the tradename PA25.

The electrolytic solution dispersed throughout battery 10 can be any of the conventional electrolytic solutions used in batteries. Typically, the electrolytic solution is an aqueous hydroxide solution. Such aqueous hydroxide solutions include potassium hydroxide solutions including, for example, between 33 and 38 by weight percent potassium hydroxide, and sodium hydroxide solutions. The electrolyte can also include about 2 by weight percent zinc oxide.

Housing 18 can be any conventional housing commonly used in primary alkaline batteries. The housing typically includes an inner metal wall and an outer electrically non-conductive material such as heat shrinkable plastic. Optionally, a layer of conductive

material can be disposed between the inner wall and the cathode 12. This layer may be disposed along the inner surface of wall, along the circumference of cathode 12 or both. This conductive layer can be formed, for example, of a carbonaceous material. Such materials include LB1000 (Timcal), Eccocoat 257 (W.R. Grace & Co.), Electrodag 109 (Acheson Colloids Co.), Electrodag 112 (Acheson) and EB0005 (Acheson). Methods of applying the conductive layer are disclosed in, for example, Canadian Patent No. 1,263,697, which is hereby incorporated by reference.

Current collector 20 is made from a suitable metal, such as brass. Seal 22 can be made, for example, of nylon.

The following example is for illustrative purposes only and is not intended as limiting.

#### Example

An example of battery 10 (AA) was prepared according to the following procedure.

The cathode included about 10.35 grams of manganese dioxide (Kerr McGee), 0.345 grams (3% by weight) of carbon fibers (Applied Sciences), about 0.65 g of 9N KOH solution, and about 0.3 weight percent of coathylene HA-1681. The anode included about 4.5 grams of zinc particles, about 3.4 grams of 36% KOH, about 1260 ppm surfactant (RM 510, Rhone Poulenc) relative to zinc, about 1.96 gram 9N KOH (with 2% dissolved ZnO), and about 1.6 weight percent total gelling agent (Carbopol 940 and A221).

The separator can be formed of one layer or two layers of non-woven, non-membrane material with one layer being disposed along a surface of the other. To minimize the volume of separator, each layer of non-woven, non-membrane material had a basic weight of about 54 grams per square meter, a thickness of about 5.4 mils when dry and a thickness of about 10 mils when wet. The anode also included about 3.17 grams of an aqueous potassium hydroxide containing 2% dissolved ZnO (about 35.5 weight percent potassium hydroxide) solution disposed in the cathode and anode as indicated above with the remainder in the separator layer. A thin coating of EB005 (Acheson) was disposed between the outer wall of the battery and the outer periphery of the cathode.

Other embodiments are contemplated. For example, the carbon fibers described above can be applied to fuel cells and other types of batteries such as metal-air batteries and air recovery batteries.

Other embodiments are in the claims.

What is claimed is:

002060 " 2403590

## CLAIMS

1           1.     A primary alkaline battery, comprising:

2           a cathode comprising a cathode active material and carbon fibers;

3           an anode;

4           a separator; and

5           an alkaline electrolyte.

1           2.     The battery of claim 1, wherein the cathode comprises less than about 5% of  
2     carbon fibers by weight.

1           3.     The battery of claim 1, wherein the cathode comprises less than about 4% of  
2     carbon fibers by weight.

1           4.     The battery of claim 1, wherein the cathode comprises less than about 3% of  
2     carbon fibers by weight.

1           5.     The battery of claim 1, wherein the cathode comprises less than about 2% of  
2     carbon fibers by weight.

1           6.     The battery of claim 1, wherein the cathode comprises between about 1% and  
2     about 5% of carbon fibers by weight.

1           7.     The battery of claim 1, wherein the cathode comprises between about 2% and  
2     about 3% of carbon fibers by weight.

1           8.     The battery of claim 1, wherein the cathode active material comprises  
2     manganese dioxide.

1           9.     The battery of claim 1, wherein the cathode comprises greater than about 86%  
2     of cathode active material by weight.

1           10. The battery of claim 1, wherein the cathode comprises greater than about 88%  
2 of cathode active material by weight.

1           11. The battery of claim 1, wherein the cathode comprises greater than about 90%  
2 of cathode active material by weight.

1           12. The battery of claim 1, wherein the cathode comprises greater than about 92%  
2 of cathode active material by weight.

1           13. The battery of claim 1, wherein the carbon fibers have a diameter less than  
2 about 250 nanometers.

1           14. The battery of claim 1, wherein the carbon fibers have a diameter between about  
2 60 nanometers and about 100 nanometers.

1           15. The battery of claim 1, wherein the carbon fibers have a diameter less than  
2 about 60 nanometers.

1           16. The battery of claim 1, wherein the carbon fibers have been heat treated.

1           17. The battery of claim 16, wherein the carbon fibers have been heat treated at a  
2 temperature greater than about 2000 °C.

1           18. The battery claim 16, wherein the carbon fibers have been heated treated at a  
2 temperature between about 2600 °C and about 3100 °C.

1           19. The battery of claim 1, wherein the carbon fibers have a length less than about 2  
2 x 10<sup>5</sup> nanometers.

1           20. The battery of claim 1, wherein the carbon fibers have a length between about  
2 500 nanometers and about 200,000 nanometers.

1           21. The battery of claim 1, wherein the carbon fibers have a length between about  
2           70,000 nanometers and about 100,000 nanometers.

1           22. The battery of claim 1, wherein the carbon fibers comprise between about 1 and  
2           about 500 layers of graphite.

1           23. The battery of claim 22, wherein the carbon fibers comprise between about 40  
2           and about 100 layers of graphite.

1           24. The battery of claim 1, wherein the carbon fibers have an external surface area  
2           between about 10m<sup>2</sup>/g and about 50 m<sup>2</sup>/g.

1           25. The battery of claim 1, wherein the carbon fibers have a surface energy between  
2           about 50 mJ/m<sup>2</sup> and about 300 mJ/m<sup>2</sup>.

1           26. The battery of claim 1, wherein the carbon fibers have a graphitic index of less  
2           than about 85%.

1           27. The battery of claim 1, wherein the carbon fibers have a length equal to or  
2           greater than an average particle size of the cathode active material.

1           28. The battery of claim 1, wherein the cathode further comprises a surfactant.

1           29. The battery of claim 28, wherein the surfactant is selected from a group  
2           consisting of polyvinyl alcohol, ethylene-vinyl alcohol, and polyvinylbutyrol.

1           30. The battery of claim 1, wherein the anode comprises zinc as an anode active  
2           material.

1           31. A primary alkaline battery, comprising:  
2           a cathode comprising manganese dioxide and a heat-treated carbon material having a  
3           diameter less than about 250 nanometers;  
4           an anode;

5 a separator; and  
6 an alkaline electrolyte.

1 32. The battery of claim 31, wherein the cathode comprises between about 1% and  
2 about 5% of carbon fibers by weight.

1 33. The battery of claim 31, wherein the cathode comprises between about 2% and  
2 about 3% of carbon fibers by weight.

1 34. The battery of claim 31, wherein the cathode has an electrical conductivity at  
2 least 3 times greater than a cathode having about 6% of graphite.




## Battery

### ABSTRACT

5 A primary alkaline battery includes a cathode having a cathode active material and carbon fibers, an anode, a separator and an alkaline electrolyte. The carbon fibers have diameters less than about 250 nanometers.

20074539.doc

08/06/2007 10:00:00

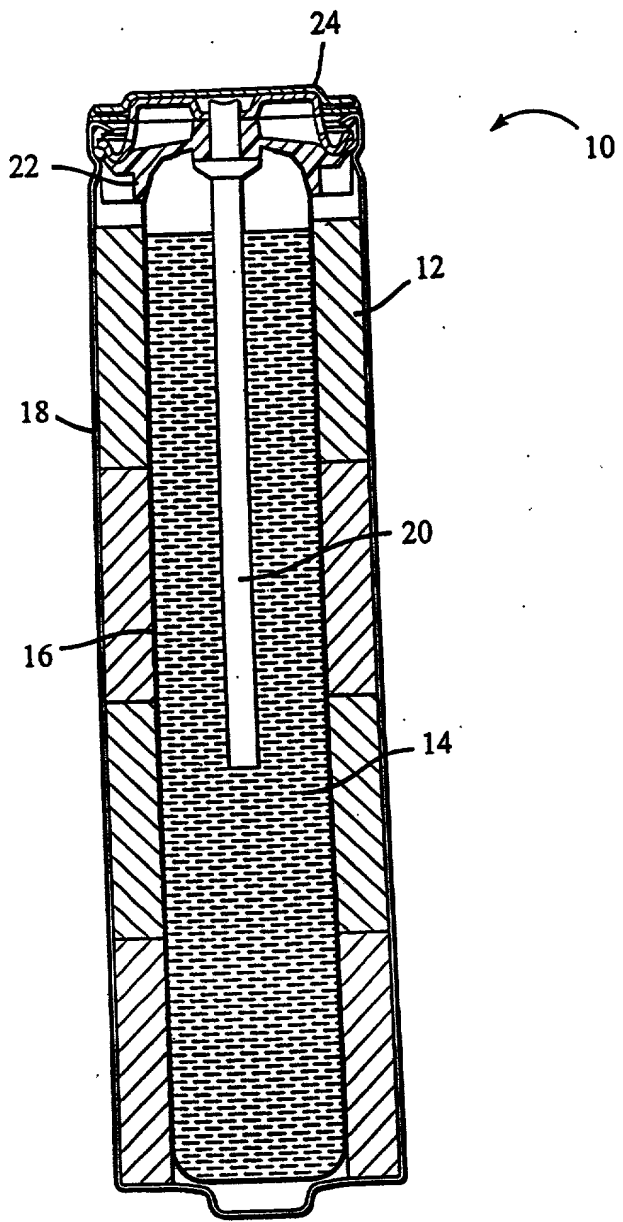

FIGURE